



## **Cisco Webex Contact Center Business Rules Engine User Guide**

**First Published:** 2020-12-07

### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2021 Cisco Systems, Inc. All rights reserved.



## Preface

- [Change History, on page iii](#)
- [About this Guide, on page iii](#)
- [Audience, on page iii](#)
- [Related Documents, on page iii](#)
- [Communications, Services, and Additional Information, on page iv](#)
- [Documentation Feedback, on page iv](#)
- [Conventions, on page iv](#)

## Change History

This table lists changes made to this guide. Most recent changes appear at the top.

Change	Date
Initial Release of Document	January 2021

## About this Guide

The Webex Contact Center Business Rules Engine User Guide describes how to integrate Cisco Webex Contact Center with Business Rules Engine. This guide also describes how to configure the Business Rules Engine.

## Audience

This document is intended for users who use Cisco Webex Contact Center to run their contact centers.

## Related Documents

To view the list of Cisco Webex Contact Center documents, go to page <https://www.cisco.com/c/en/us/support/customer-collaboration/webex-contact-center/series.html>.

To view Cisco Webex Contact Center developer documents and API references, go to page <https://apim-dev-portal.devus1.ciscoccservice.com/documentation/getting-started>.

## Communications, Services, and Additional Information

- To receive timely, relevant information from Cisco, sign up at [Cisco Profile Manager](#).
- To get the business impact you're looking for with the technologies that matter, visit [Cisco Services](#).
- To submit a service request, visit [Cisco Support](#).
- To discover and browse secure, validated enterprise-class apps, products, solutions and services, visit [Cisco Marketplace](#).
- To obtain general networking, training, and certification titles, visit [Cisco Press](#).
- To find warranty information for a specific product or product family, access [Cisco Warranty Finder](#).

### Cisco Bug Search Tool

[Cisco Bug Search Tool](#) (BST) is a web-based tool that acts as a gateway to the Cisco bug tracking system that maintains a comprehensive list of defects and vulnerabilities in Cisco products and software. BST provides you with detailed defect information about your products and software.

## Documentation Feedback

Provide your comments about this document to: [mailto:contactcenterproducts\\_docfeedback@cisco.com](mailto:contactcenterproducts_docfeedback@cisco.com).

## Conventions

This guide uses the following conventions.

Convention	Description
<b>boldface</b> font	Boldface font is used to indicate commands, such as user entries, keys, buttons, and folder and submenu names. For example: <ul style="list-style-type: none"><li>• Choose <b>Edit</b> &gt; <b>Find</b></li><li>• Click <b>Finish</b>.</li></ul>

Convention	Description
<i>italic font</i>	<p>Italic font is used to indicate the following:</p> <ul style="list-style-type: none"><li>• To introduce a new term. Example: A <i>skill group</i> is a collection of agents who share similar skills.</li><li>• For emphasis. Example: <i>Do not</i> use the numerical naming convention.</li><li>• An argument for which you must supply values. Example: <i>IF (condition, true-value, false-value)</i></li><li>• A book title. Example: <i>See the Cisco Webex Contact Center Getting Started Guide.</i></li></ul>
window font	<p>Window font, such as Courier, is used for the following:</p> <ul style="list-style-type: none"><li>• Text as it appears in code or information that the system displays. Example: <pre>&lt;html&gt;&lt;title&gt; Cisco Systems, Inc. &lt;/title&gt;&lt;/html&gt;</pre></li><li>• File names. Example: <code>tserver.properties.</code></li><li>• Directory paths. Example: <code>C:\Program Files\Adobe</code></li></ul>





# CONTENTS

---

## PREFACE

### **Preface**   iii

Change History   iii

About this Guide   iii

Audience   iii

Related Documents   iii

Communications, Services, and Additional Information   iv

Documentation Feedback   iv

Conventions   iv

---

## CHAPTER 1

### **Introduction**   1

Introduction   1

---

## CHAPTER 2

### **Business Rules Engine Implementation**   3

Creating a Set of Rules   3

Configuring a BRE DataSync Instance   6

Creating a Flow with BRE Request Activity   8







## CHAPTER 1

# Introduction

---

- [Introduction, on page 1](#)

## Introduction

The Cisco® Business Rules Engine (BRE) provides a means to upload customer specific data. The data can be retrieved at runtime to be used for routing decisions or information to be displayed to the agent.

For example, a tenant who wants to route calls to a specific group of agents based on the ANI dialed could simply upload a list of ANIs. If the ANI of the incoming call is on that list, it is routed to the group of agents specified. If the ANI is not on the list, it is routed straight through to the general queue.

A typical BRE implementation involves these major components:

- **Business Rules Engine utility** provides an interface for creating domains and rule sets. The BRE requires an incoming decision request to be associated with a *domain*. The domain contains a set of rules. Each rule is assigned a priority. The BRE tries to match the domain's highest priority rule with the decision request based on the conditions in the rules.
- **Flow Designer** is a drag-and-drop UI used to define flows that orchestrate and automate the components of the Webex Contact Center. You can create a flow that invokes the BRE.
- **BRE DataSync** configuration utility provides an interface for defining the Data Sync instances to import data into the BRE database. After a Data Sync instance is defined, the tenant can upload a .csv file. The uploaded .csv data is converted into records in the BRE database.





## CHAPTER 2


# Business Rules Engine Implementation

BRE consists of a real-time rules engine that gets invoked by the flow associated with an entry point. Typically the ANI of the incoming call along with other information associated with the call (such as an account number) are used by the rules engine to assess whether any special handling is needed for that call. This rules engine typically consults with a data repository to assess the desired call handling. The BRE configuration requires:

- [Creating a Set of Rules, on page 3](#)
- [Configuring a BRE DataSync Instance, on page 6](#)
- [Creating a Flow with BRE Request Activity , on page 8](#)

## Creating a Set of Rules

The Business Rule Engine utility is invoked by the flow when a new voice request is presented to the ACD. This section explains how rules can be set up so that the BRE utility can assist the ACD to route the incoming request.

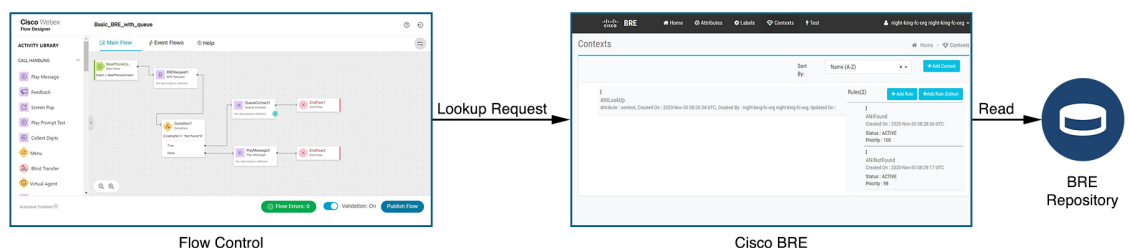

The BRE requires an incoming decision request to be associated with a domain and a set of rules. The BRE tries to match the highest priority rule with the decision request based on conditions in the rules.

Be sure to create a ruleset to cover all cases. For example, you should create rules for both *Match Found* and *Match Not Found* conditions. Or you could set up rules for multiple conditions. For example, *ANI Match* or *ANI No Match*, then *Gold* or *Silver*. In this case, you must create a rule for each possibility. For example:

- ANI Match and Gold
- ANI Match and Silver
- ANI No Match and Gold
- ANI No Match and Silver

To create a set of rules:

## Procedure

- Step 1** Log in to the Cisco Webex Contact Center Management Portal.
- Step 2** Click the path **Cisco Webex Contact Center Management Portal > Business Rules** to launch the Business Rules Engine utility.
- BRE leverages Common Identity and a Single Sign-On interaction. If the tenants have already logged in to Cisco Webex Contact Center Management Portal, they will automatically gain access to the BRE utility for their organization.
- Step 3** Create an attribute to associate with your organization:
- Select **Attributes** and click **Add** on the **Attributes** page.
  - On the **Attributes** page, enter **context** in the **Name** field.
  - Select the **Data Type** as **Text** from the drop-down list.
- The data type has to be **Text** in the BRE utility.
- Click **Save**.
- Step 4** Select **Contexts**, to display the **Contexts** page.
- Enter **Name** and an optional **Description**.
  - If more than one attribute has been created, select the attribute you want to associate with this context from the **Attribute** drop-down list.
  - Click **Save**.
- Step 5** To create rules, select the **Contexts** page.
- (Optional) Click **Add Rule** section of the page, specify the settings described in the following table:

Field	Description
Name	The name of the rule.
Description	An optional description of the rule.
Active	Select the check box to specify that the rule is active.
Priority	Drag the slider to assign a priority to the rule. The rules will be executed based on the assigned priority, from highest (100) to lowest.  It is recommended that you start assigning priorities from 100 in the descending order.
Conditions	Specify the conditions from the drop-down list and select the attributes and values.

- (Optional) Click **Add Rule(Editor)** section of the page, specify the settings that are described in the following table:

Field	Description
Name	The name of the rule.

Field	Description
Description	An optional description of the rule.
Active	Select the check box to specify that the rule is active.
Priority	Drag the slider to assign a priority to the rule. The rules will be executed based on the assigned priority, from highest (100) to lowest.
Conditions	Select the conditions from the drop-down list and specify the attributes and values.
Rule Editor	Enter the code for the rule.

c) Click **Save**.

#### Example:

The following example code returns the value for an attribute named *routeInfo* if the number the caller dialed from (ANI) matches the ANI on the list the tenants that are uploaded to the BRE database.

The screenshot shows the Cisco Business Rules Engine (BRE) interface. The top navigation bar includes 'BRE', 'Home', 'Attributes', 'Labels', 'Contexts', and 'Test'. The user is logged in as 'wxcc-engine-qa-org1 wxcc-engine-qa-org1'. The 'Contexts' tab is active, showing a list of contexts. The 'ANIFound' context is selected. The 'Name' field is 'ANIFound'. The 'Description' field is 'Description'. The 'Active' checkbox is checked. The 'Label' field is 'ANI'. The 'Priority' slider is set to 100. The 'Rule Editor' contains the following code:

```


1 when
2   c: Contact()
3   eval(c.getGlobalValuesManager().getString( c.getTenantId(),
4     c.getAttribute("context")+"." + c.getAttribute("ani")) != null)
5 then
6   c.putAttribute("routeInfo", c.getGlobalValuesManager().getString(c.getTenantId(),
7     c.getAttribute("context")+"." + c.getAttribute("ani")));
8 end

```

At the bottom of the rule editor, there are four buttons: 'View', 'Save', 'Reset', and 'Cancel'.

#### Example:

The following example code returns the value *NotFound* for the attribute *routeInfo*, if a number the caller dialed from (ANI) did not match an ANI on the list the tenants uploaded to the BRE database.

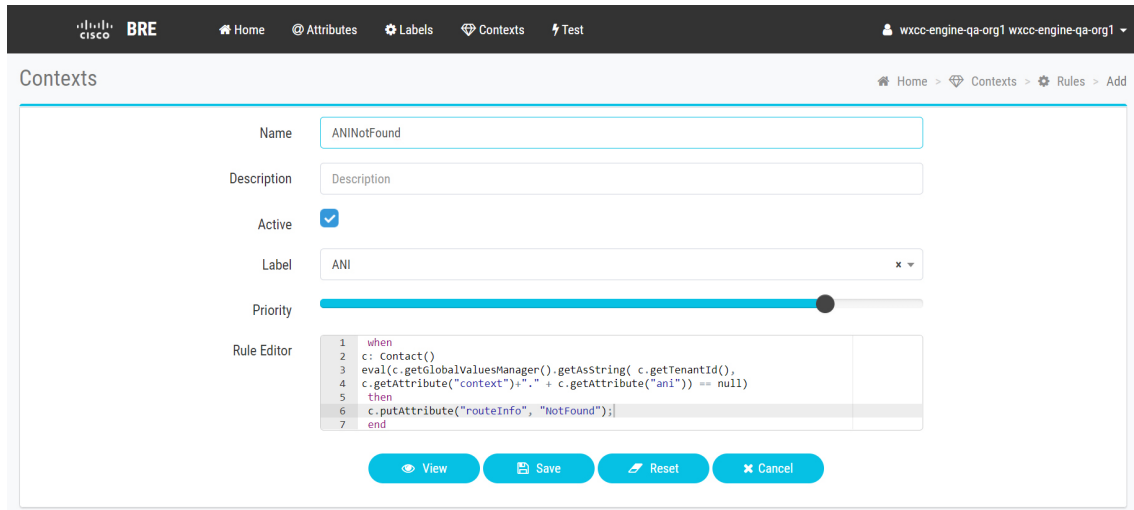


511190

# Configuring a BRE DataSync Instance

The BRE DataSync accesses a database to make routing decisions. You must periodically update the database with the appropriate information. This section describes how the BRE DataSync utility can be configured to update the BRE repository.

Figure 1: BRE DataSync Utility

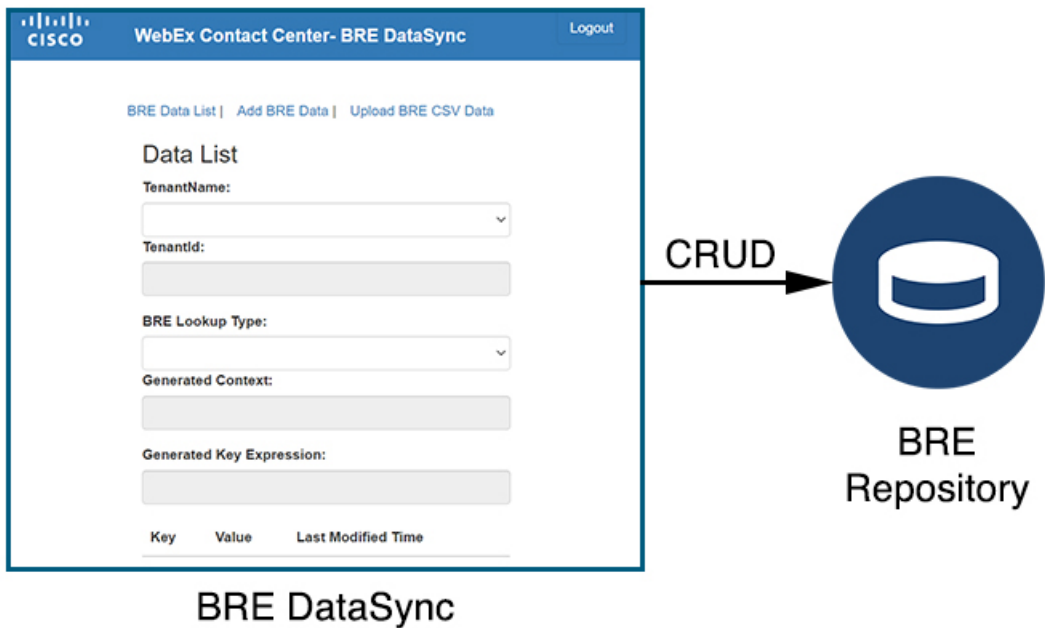

511188

The tenant administrator must create a BRE DataSync instance for every data set that the Rules Engine will be consulting during its decision-making process. The administrator can create the data set or upload a CSV file. The data is converted into records in the BRE repository.



**Note** The agent does not have access to the BRE DataSync utility.

### Before you begin

Contact Cisco Professional Services Group to get access to the BRE DataSync account.

### Procedure

- Step 1** The administrator logs in to the BRE DataSync utility.  
The BRE DataSync utility URL is: <https://rules.cjp.cisco.com/datasync/index.html>.  
The region specific BRE DataSync URLs are:  
<https://rules.wxcc-eu1.cisco.com/datasync/index.html>  
<https://rules.wxcc-eu2.cisco.com/datasync/index.html>  
<https://rules.wxcc-anz1.cisco.com/datasync/index.html>  
<https://rules.wxcc-ca1.cisco.com/datasync/index.html>
- Step 2** Select **BRE Data List** to view all the information that is related to the tenant organization.
- Step 3** Select **Add BRE Data** to add data to the BRE repository.
- Select the organization name from the **TenantName** drop-down list.
  - Select the **BRE Lookup Type** from the drop-down list.
  - Click **Add Data** to enter the **Key** and **Value**.
  - Click **Remove** to delete an existing **Key** and **Value**.
  - Click **Submit**.
- Step 4** Select **Upload BRE CSV Data** to upload the CSV file.
- Select the organization name from the **TenantName** drop-down list.
  - Select the **BRE Lookup Type** from the drop-down list.
  - Select **Upload** to browse and upload the CSV file.
  - Click **Submit**.

*Figure 2: Sample CSV File with Data*

ANI	Extension	Action
972516001	6001	Delete
972516002	6002	Update
972555999	5999	Add

The actions Delete, Update, and Add are case insensitive. You can also use the syntax `725160001,,Delete` to delete the data.

---

## Creating a Flow with BRE Request Activity

You can create flows using the Flow Designer interface available in the Webex Contact Center Management Portal. Create a flow with the **BRE Request** activity in the Webex Contact Center Flow Designer.

For more information about configuring the flow, see the *BRE Request* section in the *Cisco Webex Contact Center Setup and Administration Guide*.